


## PALITO

Housing: Pendant light, solid aluminium housing  
 Design: Ulrich Sattler | Michael Schmidt, Code2design

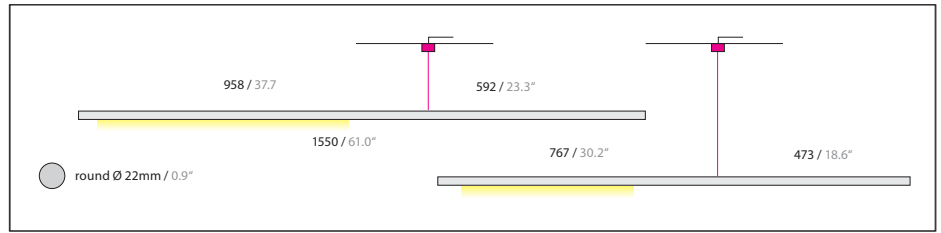

SIZE	Size: Ø / L mm	Inches	LED Watt	Lumen <sup>1)</sup>	Weight <sup>2)</sup> kg/lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
	Ø 22 / L 1240 mm	Ø 0.9 / L 48.8"	10	1.385	1,4 / 3.1	1541.	x x x.	x x.	x x.	x x.	x x x.	x
	Ø 22 / L 1550 mm	Ø 0.9 / L 61.0"	15	2.080	2,0 / 4,4	1542.	x x.	x x.	x x.	x x.	x x x.	x
LED	 CRI > 90 *CRI > 80 UGR<17 	Standard: Warm-white	3000 K	x x x.	30.	x x.	x x.	x x.	x x x.	x		
		Optional: Neutral-white	4000 K	x x x.	40.	x x.	x x.	x x.	x x x.	x		
		Extra warm-white	2700 K	x x x.	27.	x x.	x x.	x x.	x x x.	x		
		Tunable white	2700 - 6500 K*	x x x.	80.	x x.	x x.	x x.	x x x.	x		
		*(only with gesture control)										
Dimming		Standard: Dimming via gesture control		x x x.	x x.	21.	00.	x x.	x x x.	x		
		Optional: DALI dimming		x x x.	x x.	61.	00.	x x.	x x x.	x		
Finish		Standard: 66 bronze anodised brushed		x x x.	x x.	x x.	x x.		x x x.	x		
		Optional: 60 silver anodised brushed, 62 black anodised brushed, 65 champ. gold anodised brushed										
Power supply cable	 Z 80 Black			x x x.	x x.	x x.	x x.	x x.	Z80.	x		
Mounting version	 F Height adjustable on canopy Suspension with canopy DB90 and 1 power supply cable 2000 mm / 78.7"	 R Ceiling cutout Ø 68 mm / 2.7" Suspension with 1 power supply cable 2000 mm / 78.7" and cavity ceiling box, power supply in cavity ceiling box	 Z* Suspension with adapter for PALADIO TRACK System (48V) *gesture control only	x x x.	x x.	x x.	x x.	x x.	x x x.	.		



Canopy:

Type Size mm / inch

DB 90/94 Mounting version F (Standard)  
 Ø 90 / H 94 mm / 3.5 x 2.0"  
 Colour black (10), white on request

DA 80 Mounting version R, Ceiling cutout Ø 68 mm / 2.7"  
 Cover Ø 80 mm 3.1", installation depth 80 mm / 3.1"  
 Colour white (12), similar RAL 9003

Input voltage for power supply units and canopy is 220-240 VAC 50/60 Hz.



Die Leuchte besitzt durch die asymmetrische Einzelpunktabhängung einen gewissen Bewegungsspielraum, welcher kurzzeitige Positionsänderungen von bis zu 15 – 20 Grad in horizontaler und vertikaler Richtung beinhalten kann. Auslöser hierfür können äußere Einflüsse, wie z.B. sehr starkem Luftzug und leichten Berührungen sein.

Due to the asymmetrical single point suspension, the luminaire has a desired freedom of movement which may include short-term rotation of the luminaire body by up to 15 - 20 degrees in horizontal and vertical direction caused by external influences such as strong draughts and light touches.

Leuchte lässt sich mittels Rändelschraube am verstellbaren Gegengewicht grob in die gewünschte Position bringen.

Luminaire can be broadly adjusted to the desired position by means of a knurled screw with a counter Weight.

